

# 5MP IP DOME CAMERA


## YUC-HL88

### Feature

- Tampering detection / Focus bar
- Mobile view support(Push video)
- PoE support
- Onvif compliant
- SD card support continuous recording up to 64G



Server	Compression	H.264 / MPEG4/ MJPEG
	Resolution	2592x1944 / 2048x1536 / 1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32K ~ 10Mbps
	Max. Frame Rate	(15fps)2592x1944 , (30fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 / DNS /DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filetering
	Number of User	Max. 10 connections
	Storage Capacity	SD card / FTP / NAS(Samba)
	Alerting	SMTP / FTP / HTTP / SD
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
Release for alarm	Motion detection/ I/O / Schedule / Tampering detection	
Network Camera	Sensor	1/3.2" Megapixel CMOS sensor
	Optical Lens	3 ~ 9mm / F1.8
	View Angle	27.3° ~ 75.2° (H) , 19.1° ~ 54.2° (V)
	D-WDR	Off & 1 ~ 8 level
	AGC	8X ~ 64X
	Shutter Time	Outdoor / Indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000 , 1/10000
	Min Illum	1.5 Lux(Color) / 1.0 Lux(B/W)
	IR LED / Range	18pcs / 15M
	Day / Night	Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode / Synchronize with DI input
	Audio	2-way half duplex
Audio	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	External mic In(Support 2-way)
	Audio Out	External line In(Support 2-way)
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE
	Video Interface	BNC , Video composit(NTSC/PAL)
	External Port	DI / DO
	SD Card	SD Card(Up to 64GB)
General	Operation Voltage	DC12V Max.: 5.5W(IR on) / 4W(IR off) PoE Max. : 6.7W(IR on) / 4.8W(IR off)
	Dimen./Weight	132mm(φ) x 108mm(H) / 680g
	Operation Temp.	-10°C ~ +45°C

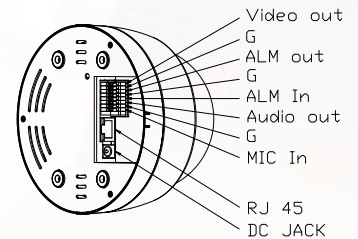

YUK D07 L-Type bracket(Optional)

Certificate : CE , FCC , RoHS

\*No SD card slot & local storage function for Argentina